


The device can be mounted in portrait, or in landscape.

A: To install the device in portrait, install the 1-gang junction box or low-voltage bracket vertically.


B: To install the device in landscape, install the 1-gang junction box or low-voltage bracket horizontally.

To install the device you will also need one of the following electrical junction boxes (not included) for the supplied mounting bracket.



**Notice!**  
 Make sure to remove the 2 original screws of the junction box before mounting the bracket.

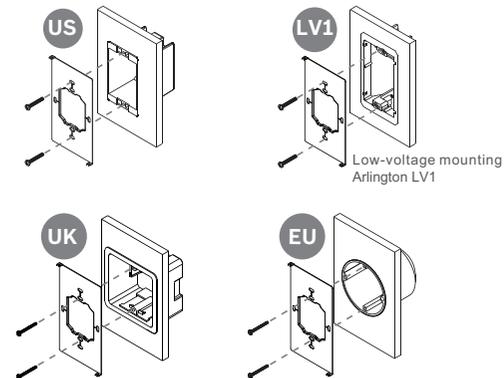


The device can be powered over the Ethernet connection (PoE) or by connecting a 24 V power supply (not included). If both are connected, the device will draw power from the 24 V power supply. The device will automatically power on when power is applied.

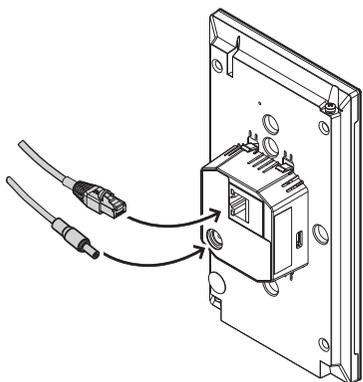

PoE connection requires IEEE 802.3af standard. Use a network switch or PoE injector that meets this standard. Connect the device using a standard T568A or T568B Ethernet cable.

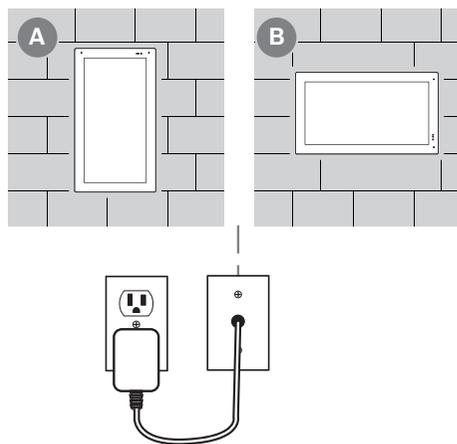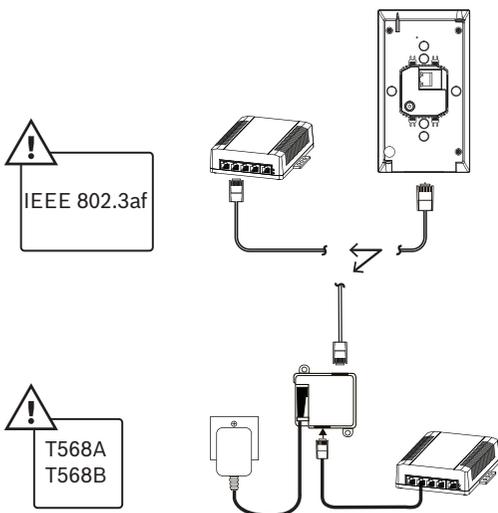


**Notice!**  
 The 24V DC power supply unit is not included.

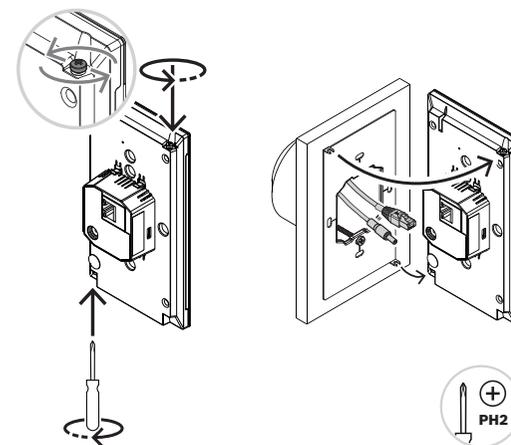

**Notice!**  
 Do not completely remove the screws from the device.


- ① Top of single-gang Box
- ② Mounting Bracket
- Wall

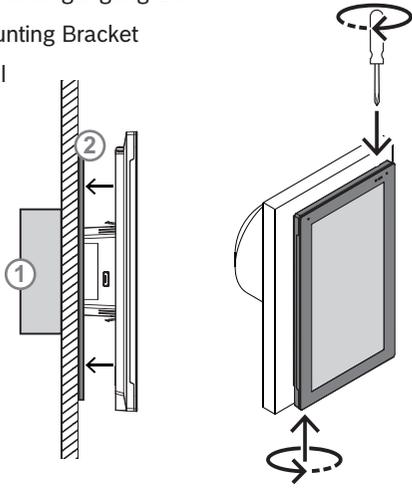


**Warning!**  
Do not press directly on the screen to mount it in place.

**Notice!**  
The following last 2 steps are for removal of the device and to reset the device, respectfully.


To remove the device, loosen the 2 screws and pull the device from the edges, one at a time.

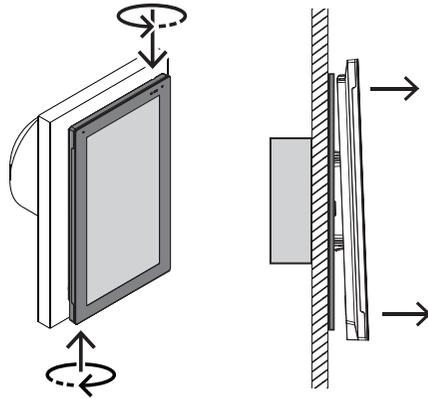

To reboot the device, use a paper clip and press the recessed event key.

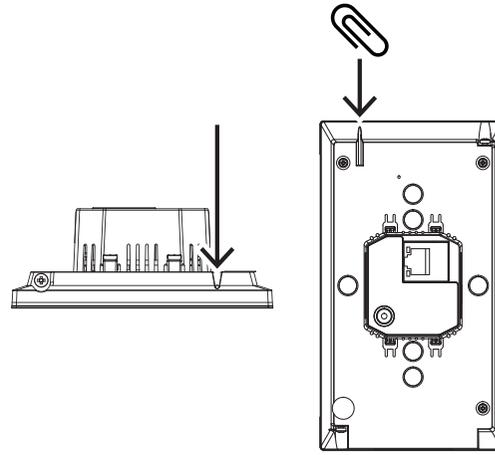

**Touch Panel Controller for MXE**  
TPC-1 Touch Panel Controller

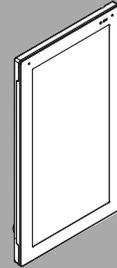

en Quick installation guide

