


SINGLE PAIR DMX CABLE

CVS LKDMX S

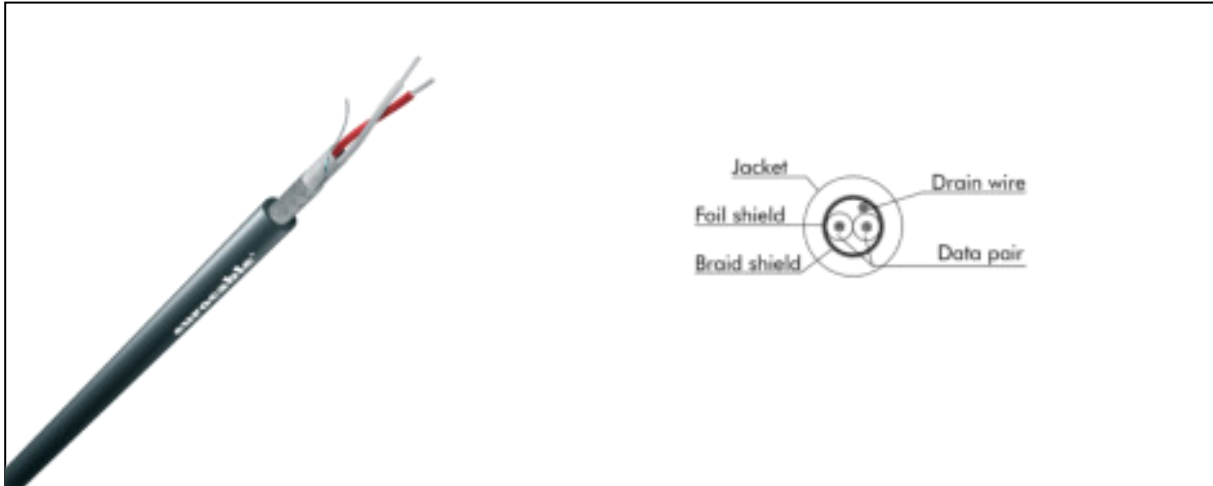

CVS LKDMX S			
ELECTRICAL DATA			
Description		Single pair for DMX 512	
D.C.R.	Conductor	65 ohm/km	
	Shield	19 ohm/km	
Capacitance 1 KHz	Cond/Cond	40 pF/m	
	Cond/Shield	90 pF/m	
Nominal Impedance		110 ohm	
Attenuation	256 KHz	2 db/100 m	
Vel. of Prop.		78%	
Inductance		55 µH/100 m	
GENERAL DATA			
Cable	O.D.	5.50 mm	
	Standard reels	200 m	
	Weight Kg/100m	4.20	
	Op. temp.	-20° C/+70° C	
Jacket	Material	PVC flame resistant	
	Nom.I Thick.	0.85 mm	
Shield	Material	First: Aluminium - Mylar foil Second: Tinned copper braid	
	Coverage	First: 100% - Second: 75%	
Conductor	Quantity	2	
	Strand	7 x 0.20 mm	
	Area/AWG	0.22 mm ² /24	
	Ins. O.D.	1.60 mm	
	Material	Annealed tinned copper foamed polyethylene insulated	