


POWERED AES/EBU DIGITAL AUDIO CABLES

CVS LKSPKAL*

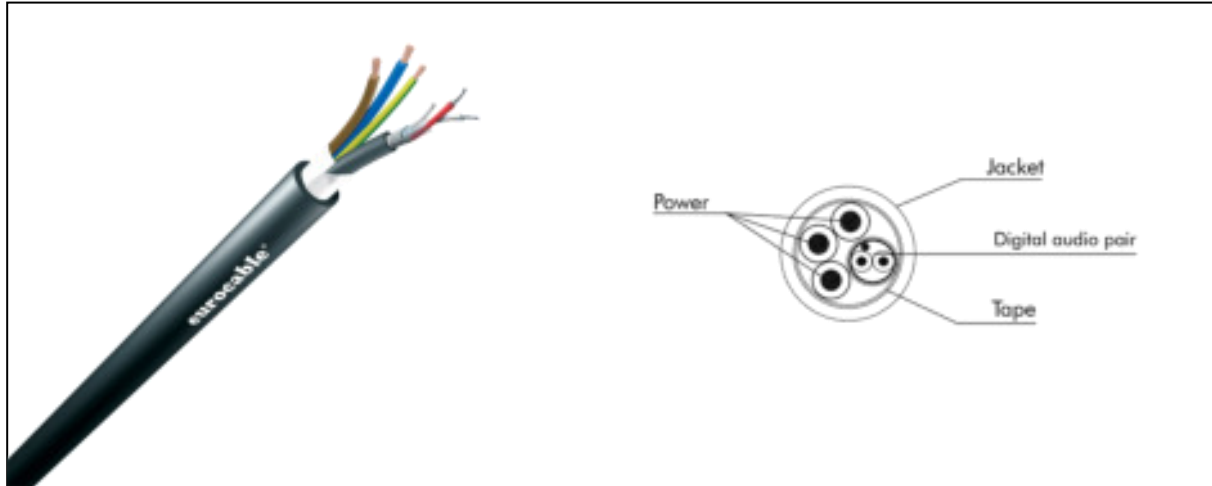

CVS LKCode		SPKAL1	SPKAL2	SPKAL4	
ELECTRICAL DATA					
D.C.R. at 20°C	Conductor		Audio: 160 ohm/km		
	Shield		< 15 ohm/km		
Capacitance	Conductor/Conductor 1 KHz		30 pF/m		
	Conductor/Shield	1 KHz	70 pF/m		
Nominal Impedance		110 ohm			
Attenuation [db/100m]		7 at 3 MHz/10 at 6 MHz			
Vel. of Prop.		80%			
GENERAL DATA					
Cable	O.D.		10.50 mm	11.60 mm	12.40 mm
	Standard reels		200 m	305 m	
	Weight	kg/100m	17	20.50	24
	Operating temperature		-20°C/+70°C		
Jacket	Material		PVC flame resistant		
	Nominal Thickness		1.30 mm	1.50 mm	
Shield	Material		Tinned copper braid + PET/ALL. tape		
	Coverage		First: 86% - Second: 100%		
Conductor	Quantity		Audio: 1 Power: 3	Audio: 1 Power: 3	Audio: 2 Power: 3
	Strand	Audio: 7 x 0.15 mm			
		Power: 48 x 0.19 mm	Power: 80 x 0.19 mm		
	Area/AWG		Audio: 0.13/26 Power: 1.5/16 (L1) 2.08/14 (L2/L4)		
	Insulation O.D.	Audio: 1.50 mm			
		Power: 2.8 mm	Power: 3.4 mm		
Material		Audio: Tinned copper polyethylene insulated Power: Bare copper fire resistant PVC insulated			