

MICRO SPOT 5

COMPACT LOUDSPEAKER

MS5

The MS5 Micro Spot is based on the original personal monitor. Redesigned with the familiar look and feel of the HS7 Hot Spot, the Micro Spot comes standard with a 7 position volume control switch. This allows the user to independently adjust their own volume without affecting the other monitors. Also, the newly designed wall and stand mount bracket is included and allows for easy positioning on any mic stand or permanent installation.



- Frequency Response: 150Hz-15kHz
- Power Handling Capacity: 100 Watts
- Sensitivity: 88dB@1watt/1meter
- High Impact ABS Plastic
- Adjustable Mic Stand/Wall Mount Bracket
- Two parallel 1/4" Input Jacks allow for daisy chaining
- 7 Position Volume Control Full on to -18dB in 3 dB steps
- Increased Low Frequency Response



MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR



MICRO SPOT 5

COMPACT LOUDSPEAKER

MS5

SPECIFICATIONS

Frequency response: 150 Hz –15 kHz

Power handling capacity: 100 Watts

Sensitivity: (1w / 1M) 88 dB (1 kHz octave band)

Maximum SPL: 113 dB

Speaker complement: One 5-inch ceramic magnet driver 14.5oz (0.451 kg)

Nominal impedance: 16 ohms

Volume control: 18 dB range; 7 positions at -3 dB each.

Input connection: Two 1/4" jacks wired in parallel

Included accessories: Bracket, SA-1, safety cable, rubber feet, Hardware

Enclosure Materials: High impact ABS

Color: Black

Dimensions: 6.25" x 6" x 7.5"

(159mm x 152.4mm x 191mm)

Net weight: 4.01 lbs. (1.82 kg)

Shipping weight: 6.05 lbs. (2.74 kg)




6.25"



6"



7.5"

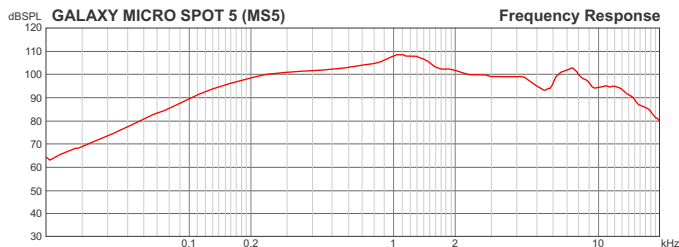

Included accessories and hardware



MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR

Specifications subject to change without notice.

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 www.galaxyaudio.com

Distributed outside the United States by E and E Exports, Inc. 2815 Junipero Ave. Suite 101Signal Hill, CA 92614
562.988.3447 FAX 562.989.3037

Distributed in Canada by Audio Distributors International (ADI) 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada
450.449.8177 FAX 450.449.8180

V10112012