

AM 2320

MIXER AMPLIFIER

DESCRIPTION

AM 2320 is a mixer-amplifiers with 4 mic-line audio inputs on removable connectors (the first input also has an XLR socket) and 2 aux inputs for music sources (e.g. CD players, tuners, etc.). The nominal power: is a 320 W amplifier. The amplifier output is available either for low impedance loudspeakers or 100 – 70 V constant voltage line.



FEATURES

- Full digital technology Mixer Amplifier 320 W RMS
- 100 V 70 V and 4 Ohm outputs
- 4 universal inputs with phantom facility on screw terminal connections
- Presence Control and per-channel High-Pass filters
- XLR connector on input 1
- RJ45 connectors on input 2 and 3 for connection to BM3001 microphone
- Configurable Priority settings, VOX facility on input 1
- Selectable aux inputs with two keys on the front panel for music source
- Aux inputs with volume and tone controls
- DigMusic On Hold and PRE outputs

Rev. E Last update: 11/02/2022



TECHNICAL SPECIFICATIONS

| Amplifier specifications | Number of channels: | 1 |
|--------------------------|---|-------------------------|
| | Power output per channel (@ 4 ohm): | 320 W RMS |
| | Power output (Hi-Z): | 320 W RMS |
| | Frequency Response (-3dB): | 50 Hz ÷ 14 Hz |
| | Distortion (THD+N) @ 1 kHz nominal power: | <0.3 % |
| Input section | Total number of inputs: | 8 |
| | Balanced: | 7 |
| | Unbalanced: | 2 |
| | Mono: | 7 |
| | Stereo: | 2 |
| | Line inputs: | 2 |
| | Line connectors: | RCA |
| | Mic+Line inputs: | 4 |
| | Mic+Line connectors: | Euroblock, XLR |
| | Mic+Line Phantom: | 32 V DC |
| | VOX: | Yes |
| | Paging inputs: | 2 |
| | Paging connectors: | RJ45 |
| | Paging command: | Contact |
| | General Purpose Inputs (GPI): | 2 |
| Output section | Signal output number: | 2 |
| | Signal output connectors: | RCA |
| | Power output connectors: | Euroblock |
| Processing | Tone controls: | Yes |
| | High-pass filter: | 150 Hz |
| Controls | Configuration: | DIP switch, Front panel |
| | Priority: | Yes |
| | Music on hold: | Yes |
| | Chime tone: | Yes |
| Protections | Cooling: | Convection |
| | Short circuit: | Yes |
| | Thermal: | Yes |
| | DC: | Yes |
| | Fuses: | Yes |
| Power requirement | Operating voltage: | 220-240/115 V~ 50/60Hz |
| | Voltage selection: | Internal |
| | Power consumption: | 600 W |
| Standard compliance | CE marking: | Yes |



| Physical specifications | Cabinet/Case Material: Color: Rack mounting: | Metal Black 19", 2U |
|-------------------------|--|---------------------------|
| Size | Height: | 88 mm / 3.46 inches |
| | Width: | 442 mm / 17.4 inches |
| | Depth: | 230 mm / 9.06 inches |
| | Weight: | 5.4 kg / 11.9 lbs |
| Shipping informations | Package Height: | 200 mm / 7.87 inches |
| | Package Width: | 500 mm / 19.69 inches |
| | Package Depth: | 330 mm / 12.99 inches |
| | Package Weight: | 6 kg / 13.23 lbs |

PART NUMBER


· 12135059

AM 2320

EAN 8024530006464



DRAWINGS

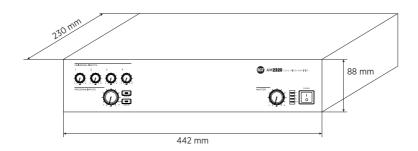

PANELS

Front panel



Rear panel

