

AT8615RS

accessories

Microphone Desk Stand with Switch



Features

- Quick-mount plug-in desk stand for 3-pin XLRM-type output
- Silent electronic mute circuit for phantom powered microphones; also works with dynamic mics
- Rugged mechanical switch provides push-on/push-off operation
- Operates on 11V to 52V phantom power
- 3-pin XLR-type connector for microphone input and output
- Heavy die-cast construction
- Low-profile design with low-reflectance black finish for minimum visibility

Description

The AT8615RS desk stand features an internal electronic mute circuit designed to work with phantom-powered microphones. A rugged mechanical on/off switch providing push-on/push-off operation controls the mute circuit. The sturdy metal base is equipped with three-pin XLRF-type input and five-pin XLRM-type output connectors. It is designed to fit any phantom-powered gooseneck microphone with a three-pin XLRM-type output. The unit's heavy die-cast construction and rubber feet help minimize coupling of surface vibration while the low profile design with low-reflectance black finish provide minimum visibility.

Architect's and Engineer's Specifications



The heavy desk stand base shall be designed to work with any dynamic gooseneck or phantom powered condenser gooseneck microphone with an integral 3-pin XLRM-type output connector. The base shall incorporate a rugged mechanical switch controlling an electronic mute circuit designed to operate with phantom-powered condenser microphones. The switch shall provide positive mechanical action and position indication to show on or off operation. It shall operate from an external 11V to 52V DC phantom power source. The unit shall offer a 3-pin XLRF-type input connector and a 3-pin XLRM-type connector for audio output. The unit shall offer a low-reflectance black finish. The unit's dimensions shall be: 160.0 mm (6.29") maximum length, 130.0 mm (5.11") maximum width, 39.0 mm (1.53") maximum height.

The Audio-Technica AT8615RS is specified.

Specifications

Input connectors	3-pin XLRF-type connector
Mute function	Silent mute circuit designed to work with condenser (powered) microphones
Switch	Mechanical push-on/push-off
Input connector	3-pin XLRF-type
Output connector	3-pin XLRM-type
Off (mute) attenuation	44 dB minimum
Phantom power Requirements	11-52V DC, 2 mA typical
Mounting	Table-top with rubber feet
Dimensions	160.0 mm (6.29") maximum length, 130.0 mm (5.11") maximum width, 39.0 mm (1.53") maximum height

In the interest of standards development, A.T.U.S. offers full details on its test methods to other industry professionals on request. Specifications are subject to change without notice.

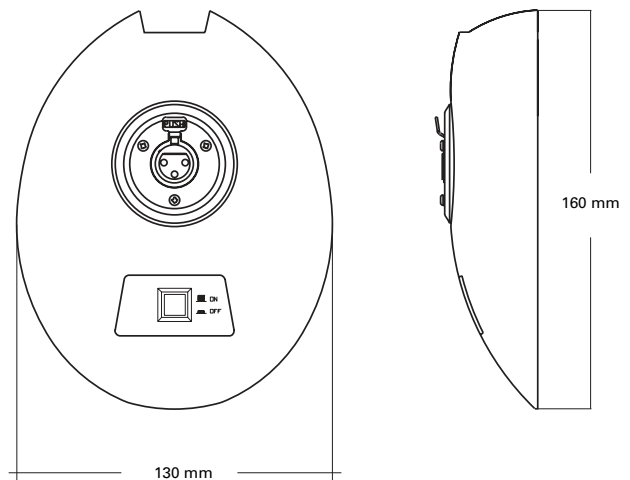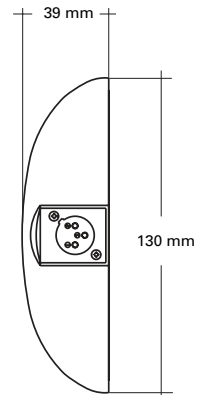

Audio-Technica U.S., Inc., 1221 Commerce Drive, Stow, Ohio 44224
Audio-Technica Limited, Old Lane, Leeds LS11 8AG England
©2010 Audio-Technica U.S., Inc. audio-technica.com

0001-0243-00