




EVE E-50Z

EVE E-50Z is an LED ellipsoidal that shines a hard-edged, warm white spot designed for mobile and installation applications. It features [D-Fi™ USB](#) compatibility for wireless Master/Slave or DMX control. Manual zoom gives you the flexibility to project from any distance and its framing shutters let you easily alter and control the projected beam. EVE E-50Z includes holders for glass and steel gobos as well as a gel frame. You can operate EVE E-50Z in standalone mode eliminating the need for DMX control and you can save time running extension cords by power linking multiple units. White housing not available in European Markets.

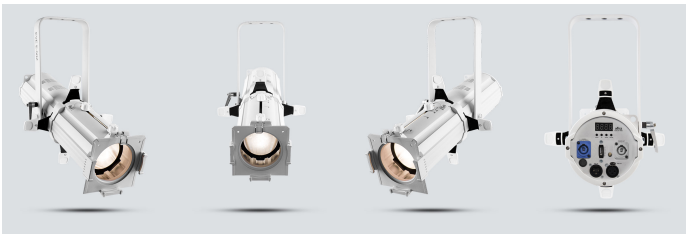

Highlights

- LED Ellipsoidal shines a hard-edged, warm white spot in any direction
- Easily highlight areas by altering the projected beam with framing shutters
- Flexibility to project from any distance using the manual zoom
- D-Fi USB compatibility for wireless Master/Slave or DMX control
- Flicker-free operation suitable for on-camera use
- Includes holders for glass and steel gobos and a gel frame
- Save time running extension cords by power linking multiple units
- Eliminate the need for DMX control with standalone operation
- Available in black or white

Specifications

- DMX Channels: 1 or 3
- DMX Connectors: 3-pin XLR
- Light Source: 1 LED (warm white) 50 W, (1.3 A), 50,000 hours life expectancy
- Strobe Rate: 0 to 29 Hz
- PWM Frequency: 1.2 kHz
- Illuminance: (20°): 7,910 lux @ 2 m
(39°): 2,710 lux @ 2 m
(20°): 1,479 lux @ 5 m
(39°): 508 lux @ 5 m
- Power Linking: 16 units @ 120 V; 26 units @ 230 V
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 59 W, 0.5 A @ 120 V, 60 Hz
63 W, 0.3 A @ 230 V, 50 Hz
- Gobo Size: D (53.3 mm outside, 43 mm image, 2mm max thickness)
- Zoom Angle: (manual): 20° to 39
- Weight: 9.2 lb (4.2 kg)
- Size: 18.9 x 6.2 x 15 in (480 x 157 x 381 mm)
- Approvals: CE, MET
- Color Temperature: 3500 K
- Gel Frame Size: 5.5 in (140 mm)
- Optional Controllers: D-Fi USB
- CRI: 80