


## Teranex Mini SDI to Audio 12G



---

De-embed audio from any SD, HD or Ultra HD SDI video connection and output 2 channels of analog audio to balanced XLR, optical or HiFi RCA, or output up to 4 channels of AES/EBU digital audio. Perfect for converting and outputting SDI audio to a massive range of audio equipment such as audio mixers, iPods, analog broadcast decks, audio monitors and more.

**\$495**

---

### Connections

#### SDI Video Inputs

1 x 12G-SDI SD/HD/2K/4K auto switching.

#### SDI Video Outputs

1 x 12G-SDI loop output.

#### Analog Audio Outputs

2 channels professional balanced analog audio via XLR connectors, or 2 channel unbalanced analog line level via RCA connectors. Right XLR can be configured for timecode output.

#### Digital Audio Outputs

4 channels professional 110Ω balanced digital audio via XLR connectors. Right XLR can be configured for timecode output.

#### Embedded Audio Support

16 channels.

#### Optical Audio Output

S/PDIF Signal with TOSLINK Connector.

#### Multi Rate Support


Automatic switching between SD/HD/2K and 4K.

#### Updates and Configuration

USB or Ethernet.

#### Reclocking

Yes

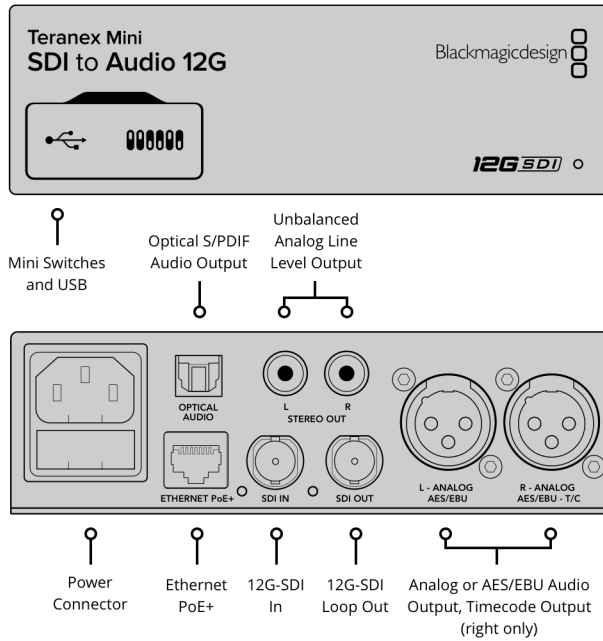

## Standards

### SD Video Standards

525i59.94 NTSC, 625i50 PAL

### HD Video Standards

720p50, 720p59.94, 720p60  
 1080p23.98, 1080p24, 1080p25,  
 1080p29.97, 1080p30, 1080p50,  
 1080p59.94, 1080p60  
 1080PsF23.98, 1080PsF24,  
 1080PsF25, 1080PsF29.97, 1080PsF30  
 1080i50, 1080i59.94, 1080i60

### 2K Video Standards

2K DCI 23.98p, 2K DCI 24p, 2K DCI  
 25p  
 2K DCI 23.98PsF, 2K DCI 24PsF, 2K  
 DCI 25PsF

### Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25,  
 2160p29.97, 2160p30, 2160p50,  
 2160p59.94, 2160p60

### 4K Video Standards

4K DCI 23.98p,, 4K DCI 24p 4K DCI  
 25p

### SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE  
 296M, SMPTE 372M, SMPTE 424M,  
 SMPTE 425M Level A and B, SMPTE  
 2081-1, SMPTE 2081-10, SMPTE  
 2082-1 and SMPTE 2082-10

### SDI Video Rates

SDI video connections are auto  
 switching between standard  
 definition SDI, high definition level A  
 and level B 3G-SDI, 6G-SDI, and 12G-  
 SDI.

### SDI Video Sampling

4:2:2 and 4:4:4.

### SDI Audio Sampling

Television standard sample rate of 48  
 kHz and 24-bit.

### SDI Color Precision

YUV 4:2:2 and RGB 4:4:4 in HD, 2K  
 and 4K.

### SDI Color Space

REC 601, REC 709

## Software

### Software Control

Mac™ and Windows™ software  
 upgrade via USB and Ethernet.

### Internal Software Upgrade

Via included updater application.

---

## Operating Systems



Mac 10.14 Mojave,  
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

---

## Settings Control

### Basic Settings Control

Mini Switches, USB and Ethernet via  
free software utility

### Optional Front Panel Control

Front mounted Smart Panel with LCD,  
rotary knob and six settings buttons

---

## Power Requirements

### Power Supply

1 x built-in international AC power  
supply with IEC C14 inlet. IEC Power  
cable required. 90 - 240V AC Input.

### Power Over Ethernet

Can be powered via 48V DC using  
PoE+ (power over ethernet).

### Power Consumption

16 Watts

### Operational Voltage Range

90 - 240V AC

---

## Physical Specifications



---

## Environmental Specifications

### Operating Temperature

0° to 40°C (32° to 104°F)

### Storage Temperature

-20° to 60°C (-4° to 140°F)

### Relative Humidity

0% to 90% non-condensing

---

## What's Included

Teranex Mini SDI to Audio 12G  
SD card with software and manual

---

## Warranty

3 year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2020, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller